

StrongBOLT

2200

BS 5 Lever Sashlock



Application:

- For timber doors hinged on the left or right
- Suitable for doors up to 54mm thick

Specification:

- Chamfered bolt design increases the performance of the lock under side load testing. The chamfer of the bolt also makes drilling attack more difficult
 - Anti-pick, anti-saw and anti-drill security features for resistance against attack
 - Radius inner forend for ease of installation
 - Can be installed in the many UK mortices without the need for additional carpentry or spoiling the edge of the door
 - Anti-pick and keyhole protection prevents forced entry by picking
 - Hardened steel pins provide resistance to attack from sawing
 - Deadbolt locked or unlocked by the key from either side
 - 20mm deadbolt for secure positive deadlocking and additional resistance against attack
 - 2200S can be keyed alike with 2100S
-
- Case Size: 68mm (2.5") or 81mm (3")
 - Backset: 45mm or 57mm
 - Case: Steel, red powder coat
 - Forend: Stainless steel or brass
 - Striking Plate: Finished to match forend
 - Faceplate: Supplied with square faceplate which covers a radius inner forend
 - Deadbolt: Zinc with hardened steel rollers
 - Latch Bolt: Zinc
 - Follower: Sintered Steel
 - Rebate Kit: 2200REB 13mm (0.5")
 - Keying Groups: May be supplied to pass or differ. Supplied with 2 steel nickel plated keys
 - Key Blank Number: JKB SBOLT
 - Packaging: Individually boxed (supplied in outer boxes of 10) or Visipacked



Standards:

- Tested to BS3621:2007


| | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| 2 | M | 4 | 1 | 0 | F | 7 | K | D | 2 | B |
|---|---|---|---|---|---|---|---|---|---|---|



Finish:

- SC - Satin Stainless Steel
- PL - Polished Brass finish

Technical Design:

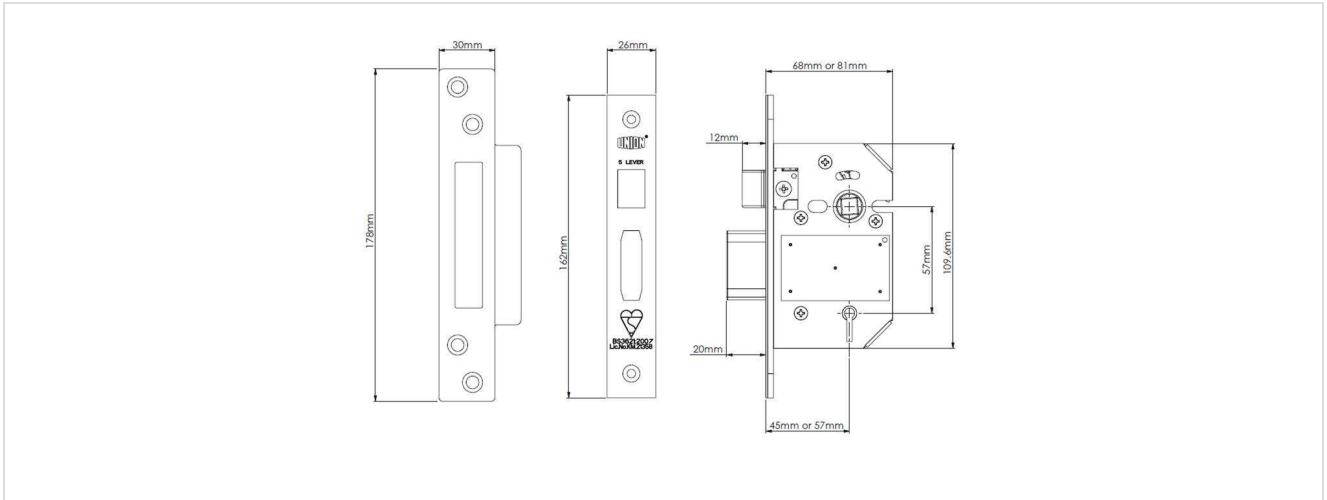

Variants:

| Code | Description |
|-----------------|------------------------------------------------|
| J2200S-PL-2.5 | S.BOLT BS5 LVR S.LOCK, PB FINISH, 2.5"CASE, |
| J2200S-PL-3.0 | S.BOLT BS5 LVR S.LOCK, PB FINISH, 3"CASE, |
| J2200S-SC-2.5 | S.BOLT BS5 LVR S.LOCK, SS/SC FINISH, 2.5"CASE, |
| J2200S-SC-3.0 | S.BOLT BS5 LVR S.LOCK, SS/SC FINISH, 3"CASE, |
| Y2200S-PL-2.5 | S.BOLT BS5 LVR S.LOCK, PB, 2.5"CASE, VISI |
| Y2200S-PL-3.0 | S.BOLT BS5 LVR S.LOCK, PB, 3"CASE, VISI |
| Y2200S-SC-2.5 | S.BOLT BS5 LVR S.LOCK, SS/SC, 2.5"CASE, VISI |
| Y2200S-SC-3.0 | S.BOLT BS5 LVR S.LOCK, SS/SC, 3"CASE, VISI |
| JP2200S-PL-2.50 | BS 5 LEV. S/LOCK SQ.FOREND(KA) |
| JP2200S-PL-3.00 | BS 5 LEV. S/LOCK SQ.FOREND(KA) |
| JP2200S-SC-2.50 | BS 5 LEV. S/LOCK SQ.FOREND(KA) |
| JP2200S-SC-3.00 | BS 5 LEV. S/LOCK SQ.FOREND(KA) |